




## UIN BEARING CORP.

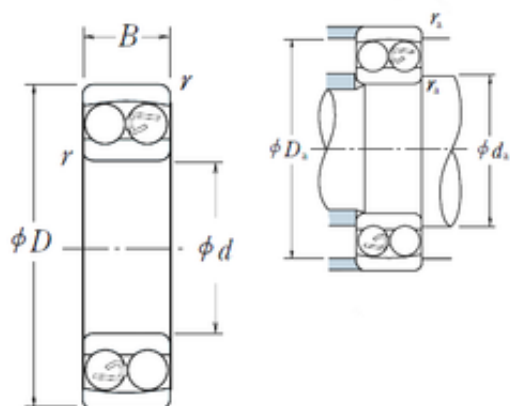

### 110 mm x 240 mm x 80 mm FC2030106 Rolling Mill Bearing 100X150X106mm

Bearing No. 2322

2322 Bearing 2D drawings and 3D CAD models

Size	110x240x80 mm
Bore Diameter	110 mm
Outer Diameter	240 mm
Width	80 mm
d	110 mm
D	240 mm
B	80 mm
C	80 mm
r min.	3 mm
da min.	123 mm
Da max.	227 mm
ra max.	2,5 mm
Weight	17,4 Kg
Basic dynamic load rating (C)	211 kN
Basic static load rating (C0)	94,5 kN
(Grease) Lubrication Speed	2 200 r/min
(Oil) Lubrication Speed	2 800 r/min
Calculation factor (e)	0,37
Calculation factor (Y0)	1,8
Calculation factor (Y2)	2,6
SRI	19.72
Y3	1.7
hidYobi	2322
LangID	1
PCD	175



## UIN BEARING CORP.

D_	240
Y2	2.6
SREX	0
cyl count	13
B_	80
hidTable	ecat_NSSAB
Oil rpm	2800
SRE	0
Y0	1.8
mass	17.3
ra	2.5
GRS rpm	2200
SRIX	0.125
groove inner	138.399
D_a	227
SRIN	0
C0	94.5
groove outer	216.741
SREN	0
X0	1
Prod_Type3	SABB_SA_CB
X1	1
da	123
X2	0.65
e	0.37
yobi	2322
r	3
KBRG	135
CAng	13.836
cyl dia	36.512